

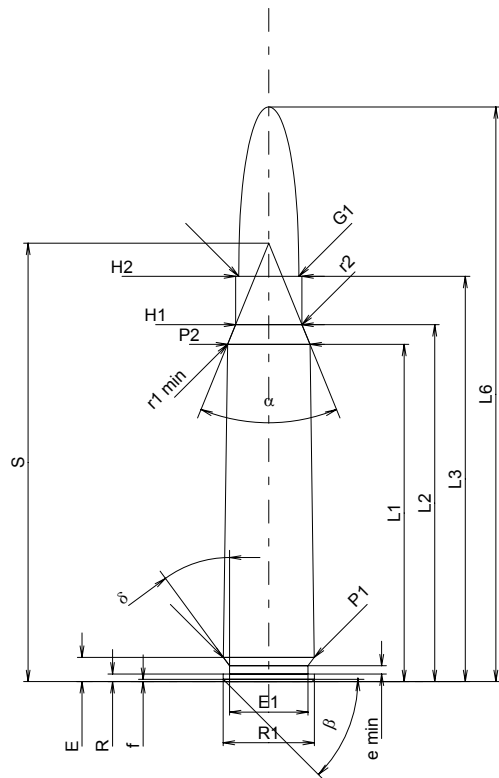
C.I.P.**7,65 x 53 Arg.**

TAB. I

Date 84-06-14

Pays d'origine: DE

Révision 02-05-15

**CARTOUCHE MAXI****Longueurs**

L1 ^{1)*}	=	44.60	-0.20
L2 ^{1)*}	=	47.20	-0.20
L3 ¹⁾	=	53.60	
L4	=		
L5	=		
L6	=	76.00	

Culot

R	=	1.00	
R1	=	12.05	
R3	=		
E	=	3.20	
E1	=	10.40	
e min	=	1.10	
delta	=	35°41'24"	
f	=	0.30	
beta	=	45°	

Chambre à poudre

P1	=	12.01	
P2 ^{1)*}	=	10.90	-0.20

Cône de raccordement

alpha	=	44°21'38"	
S	=	57.97	
r1 min	=	2.20	
r2	=	2.20	

Collet

H1 ^{1)*}	=	8.78	
H2	=	8.78	

Projectile

G1 ¹⁾	=	7.94	
G2	=		
F	=		
L3+G ¹⁾	=	73.60	

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3900 bar	
PK	=	4485 bar	
PE	=	4875 bar	
M	=	25.00	
EE	=	3700 Joule	

Autres indications

Fe ¹⁾	=	0.10	
delta L	=		

CHAMBRE MINI**Longueurs**

L1 [*]	=	44.50	
L2 [*]	=	47.00	
L3 ¹⁾	=	53.70	

Cuvette

R	=	1.00	
R1	=	12.13	
R2	=		
R3	=		
r	=		

Chambre à poudre

E	=	3.20	
P1 ¹⁾	=	12.05	
P2 [*]	=	10.93	

Cône de raccordement

alpha ¹⁾	=	46°08'52"	
S	=	57.33	
r1 max	=	2.20	
r2	=	2.20	

Collet

H1 [*]	=	8.80	
H2 ¹⁾	=	8.80	

Prise de rayures

G1 ^{1)*}	=	8.00	
G ^{1)*}	=	20.00	
alpha1	=	90°	
h [*]	=	0.40	
s	=		
i ¹⁾	=	0°30'41"	
w	=		

Canon

F ^{1)*}	=	7.65	
Z ¹⁾	=	7.92	

Rayures

b	=	4.20	
N	=	4	
u	=	280.00	
Q	=	48.36	mm ²

Échelle 1:1

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
* Dimensions de base