

C.I.P.**30 Super FI. H&H**


TAB. II

Date 84-06-14

Pays d'origine: GB

Révision 11-05-25

Marquage alternatif: 300 FI. N.E.

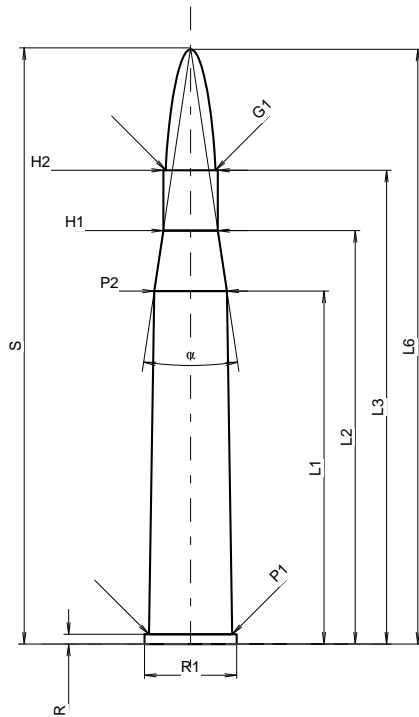**CARTOUCHE MAXI****Longueurs**

L1 *	=	55.63
L2 *	=	65.15
L3 ¹⁾	=	74.68
L4	=	
L5	=	
L6	=	93.73

Culot

R ¹⁾	=	1.52	-0.25
R1	=	14.53	
R3	=		
E	=		
E1	=		
e min	=		
δ	=		
f	=		
β	=		

Chambre à poudre

P1	=	13.13
P2 *	=	11.43

Cône de raccordement

α	=	16°58'3"
S	=	93.94
r1 min	=	
r2	=	

Collet

H1 *	=	8.59
H2 ¹⁾	=	8.59

Projectile

G1 ¹⁾	=	7.82
G2	=	
F	=	
L3+G ¹⁾	=	81.67

Pressions (Énergies)**Méthode transducteur**

Pmax	=	3200 bar
PK	=	3680 bar
PE	=	4000 bar
M	=	25.00
EE	=	3520 Joule

Autres indications

Fe ¹⁾⁴⁾	=	0.15
delta L	=	

CHAMBRE MINI**Longueurs**

L1 *	=	55.65
L2 *	=	65.18
L3 ¹⁾	=	74.93

Cuvette

R ¹⁾	=	1.55
R1	=	14.78
R2	=	
R3	=	
r	=	

Chambre à poudre

E	=	
P1 ¹⁾	=	13.16
P2 *	=	11.46

Cône de raccordement

α	=	16°56'58"
S	=	94.11
r1 max	=	
r2	=	

Collet

H1 *	=	8.62
H2 ¹⁾	=	8.61

Prise de rayures


G1 ¹⁾ *	=	7.89
G ¹⁾ *	=	6.99
α1	=	180°
h	=	
s	=	
i ¹⁾	=	1°06'23"
w	=	

Canon

F ¹⁾ *	=	7.62
Z ¹⁾	=	7.82

Rayures

b	=	2.72
N	=	6
u	=	254.00
Q	=	47.27 mm ²

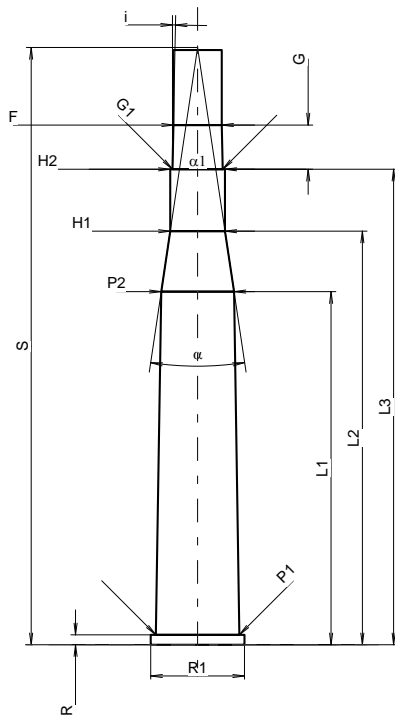

Échelle 1:1.19

Dimensions en << mm >>
Dimensions et tolérances pour les canons
d'épreuve: Voyez Annexe CR 1.

Notes: 1) A' contrôler pour la sécurité
4) Feuillure sur la bourrelet
* Dimensions de base